


This product is elaborately designed and manufactured with advanced rotary sealed compressor, hydrophilic membrane inner thread and high efficient heat transmitter and exchanger etc. and it has passed the test & inspection by related experts & departments. It has characteristics of small volume, light weight, stable performance, safety and reliability etc. It is convenient to use and it can be used immediately after the purchase without installation. It can be widely applicable in the locations that have requirements to the local cooling effect, e.g., the cooling to the operations or equipments such as CNC equipments, computer controllers etc. in the big type of workshops without air-conditioner.

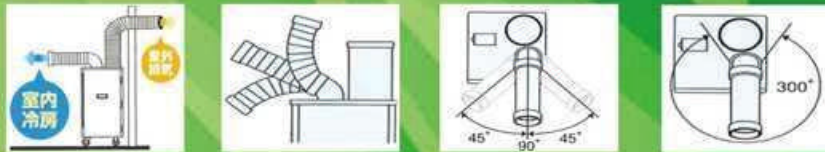

Model	CPA - 25
Power Source	220 V
Frequency	50Hz
Input Power	880W
Cooling Volume	2500W (8500BTU)
Compressor	SEALED ROTARY
Coolant	R22, R407C
Noise	< 55dB
Outside Dimension	W390 X D450 X H880
Weight	40KG

Model	CPA - 35
Power Source	220 V
Frequency	50Hz
Input Power	1000W
Cooling Volume	3200W (11000BTU)
Compressor	SEALED ROTARY
Coolant	R22, R407
Noise	< 55dB
Outside Dimension	W400 X D430 X H820
Weight	43KG

ワイドレンジ仕様
 室温10℃(湿度50%)～45℃
 (湿度40%)の間で運転可能
 です。25℃以下でも冷房運転
 できるので幅広い用途で使
 用できます。機内冷却や製造ラ
 イン上の冷風供給など夏季以
 外にもさまざまな用途でご使
 用いただけます。

- 新冷媒採用機
- ミニドレン
- 冷風1口
- 首振りなし

